



24v KIT INSTRUCTIONS

Step by Step (S2) v2 06-02-06

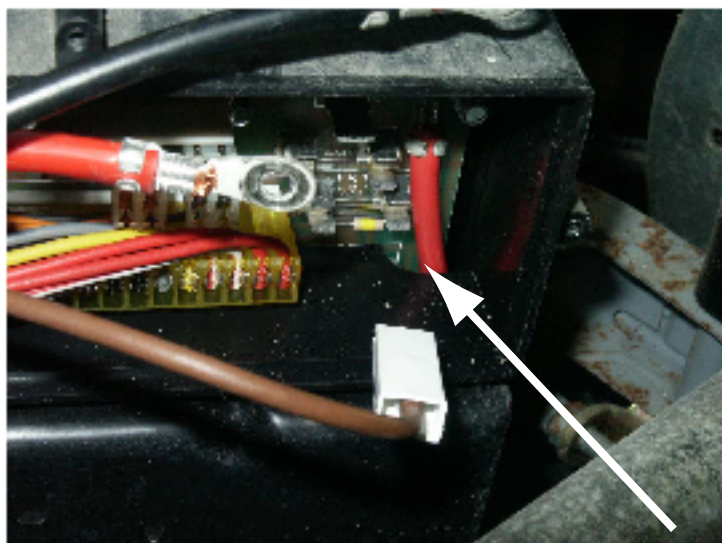

BE VERY CAREFUL NOT TO DROP THE LOOSE NUTS OR SHAKEPROOF WASHERS DOWN THESE HOLES. IF YOU DO; YOU MAY BE ABLE TO SHAKE THEM OUT WHEN REMOVED OTHERWISE YOU WILL **HAVE TO DISMANTLE THE CONTROL BOX**

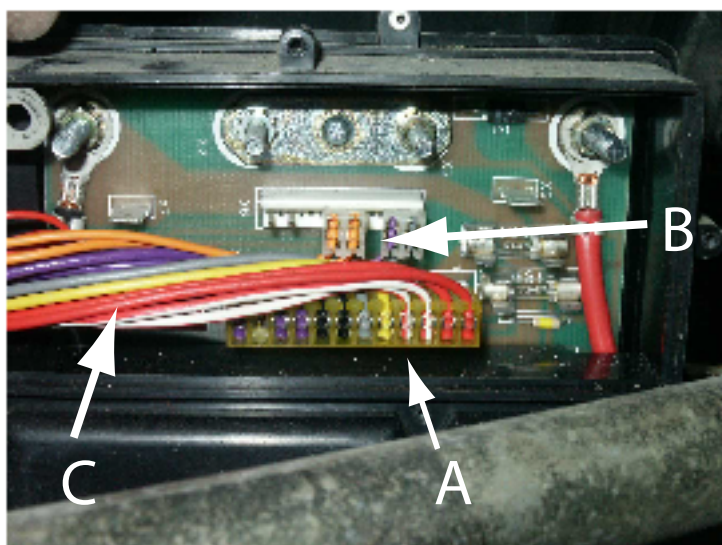


For ease, disconnect the cables in the following order.

- A. Main lights wiring
- B. Thermistor and Temp Lockout
- C.(hidden) Red Instrument pod wiring loom

This will allow for easiest removal. If you need to refit; do so in reverse order.

All these connections are a push fit.

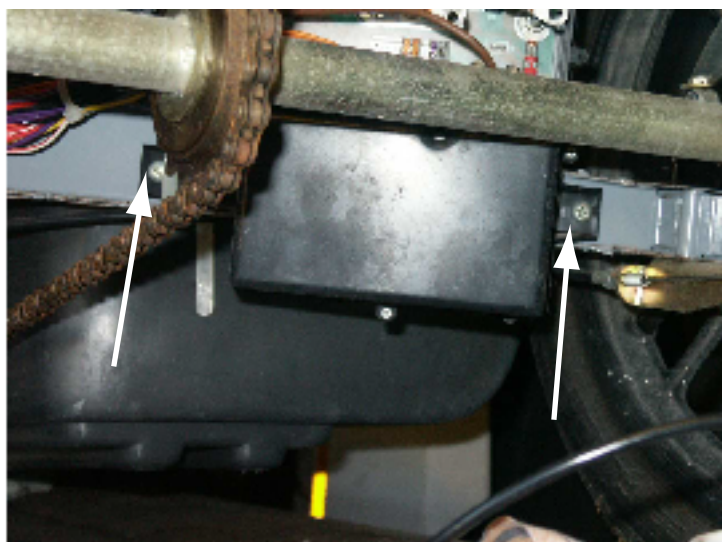

To remove the control box undo these two marked bolts. When removed the control box will slide to the right slightly to allow it to slip out of the retaining large cable tie.