

24v KIT INSTRUCTIONS

Step by Step (S7) v2 06-02-06



Control box/throttle connections




To remove or attach the throttle cable to the control unit.



Turn the control unit over and remove 2 countersunk screws in the base.



Locate the Throttle cable plug release the retaining tangs. and pull the connector up and off the board.

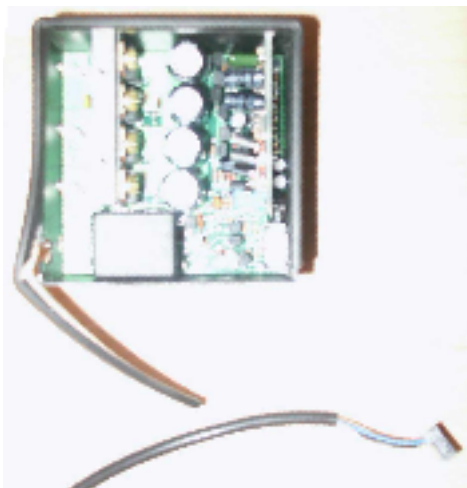

Lift off the rubber seal and the cable will pull free.
Re-fitting is the reverse sequence.